



2.1 SERIES

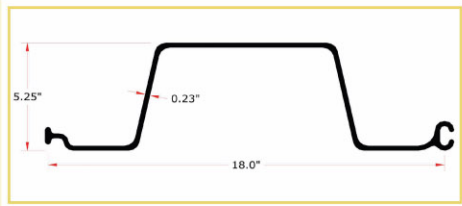


Strength Rating (M)	Lbs-Ft/Ft	2,125	Modulus of Elasticity (E)	psi	380,000
Allowable Shear (V)	Lbs/Ft	1,960	Co-Extruded		Yes
Thickness (t)	inches	0.23	Section Depth	inches	5.25
Section Modulus (Z)	in ³ /ft	7.7	Section Width	inches	18
Moment of Inertia (I)	in ⁴ /ft	20.3	UV Stabilized		Yes
Ultimate Tensile Stress	psi	6,300	Standard		22 &
Creep Limited stress	psi	4,000	Packaging		bundle 10

3.1 SERIES

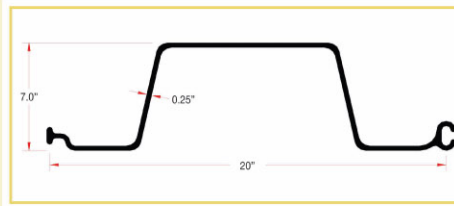


Strength Rating (M)	Lbs-Ft/Ft	3,129	Modulus of Elasticity (E)	psi	380,000
Allowable Shear (V)	Lbs/Ft	2,536	Co-Extruded		Yes
Thickness (t)	inches	0.25	Section Depth	inches	7
Section Modulus (Z)	in ³ /ft	11.4	Section Width	inches	20
Moment of Inertia (I)	in ⁴ /ft	39.8	UV Stabilized		Yes
Ultimate Tensile Stress	psi	6,300	Standard		20 &
Creep Limited stress	psi	4,000	Packaging		bundle 10

3.5 SERIES

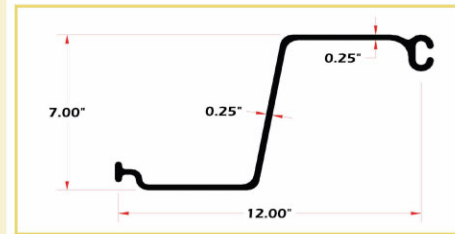


Strength Rating (M)	Lbs-Ft/Ft	3,490	Modulus of Elasticity (E)	psi	380,000
Allowable Shear (V)	Lbs/Ft	2,130	Co-Extruded		Yes
Thickness (t)	inches	0.23	Section Depth	inches	7
Section Modulus (Z)	in ³ /ft	12.7	Section Width	inches	12
Moment of Inertia (I)	in ⁴ /ft	44.4	UV Stabilized		Yes
Ultimate Tensile Stress	psi	6,300	Standard		40 &
Creep Limited stress	psi	4,000	Packaging		bundle 20

4.0 SERIES

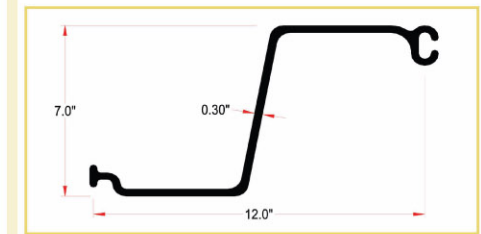


Strength Rating (M)	Lbs-Ft/Ft	3,985	Modulus of Elasticity (E)	psi	380,000
Allowable Shear (V)	Lbs/Ft	2,550	Co-Extruded		Yes
Thickness (t)	inches	0.3	Section Depth	inches	7
Section Modulus (Z)	in ³ /ft	14.5	Section Width	inches	12
Moment of Inertia (I)	in ⁴ /ft	50.6	UV Stabilized		Yes
Ultimate Tensile Stress	psi	6,300	Standard		40 &
Creep Limited stress	psi	4,000	Packaging		bundle 20

4.1 SERIES

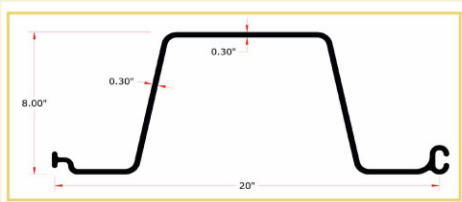


Strength Rating (M)	Lbs-Ft/Ft	4,298	Modulus of Elasticity (E)	psi	380,000
Allowable Shear (V)	Lbs/Ft	3,446	Co-Extruded		Yes
Thickness (t)	inches	0.30	Section Depth	inches	8
Section Modulus (Z)	in ³ /ft	15.6	Section Width	inches	20
Moment of Inertia (I)	in ⁴ /ft	62.3	UV Stabilized		Yes
Ultimate Tensile Stress	psi	6,300	Standard		20 &
Creep Limited stress	psi	4,000	Packaging		bundle 10

6.5 SERIES

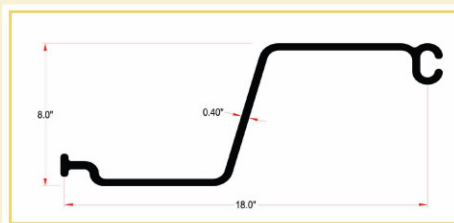


Strength Rating (M)	Lbs-Ft/Ft	5,481	Modulus of Elasticity (E)	psi	380,000
Allowable Shear (V)	Lbs/Ft	2,518	Co-Extruded		Yes
Thickness (t)	inches	0.40	Section Depth	inches	8
Section Modulus (Z)	in ³ /ft	19.9	Section Width	inches	18
Moment of Inertia (I)	in ⁴ /ft	79.6	UV Stabilized		Yes
Ultimate Tensile Stress	psi	6,300	Standard		12
Creep Limited stress	psi	4,000	Packaging		bundle 6

8.5 SERIES

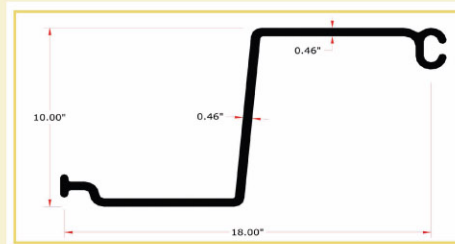

Strength Rating (M)	Lbs-Ft/Ft	8,533	Modulus of Elasticity (E)	psi	380,000
Allowable Shear (V)	Lbs/Ft	3,470	Co-Extruded		Yes
Thickness (t)	inches	0.46	Section Depth	inches	10
Section Modulus (Z)	in ³ /ft	31	Section Width	inches	18
Moment of Inertia (I)	in ⁴ /ft	155.0	UV Stabilized		Yes
Ultimate Tensile Stress	psi	6,300	Standard		12 &
Creep Limited stress	psi	4,000	Packaging		bundle 6

10.5 SERIES

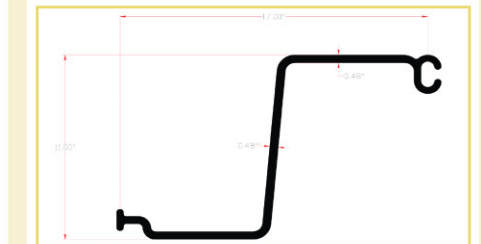

Strength Rating (M)	Lbs-Ft/Ft	10,075	Modulus of Elasticity (E)	psi	380,000
Allowable Shear (V)	Lbs/Ft	4,360	Co-Extruded		Yes
Thickness (t)	inches	0.48	Section Depth	inches	11
Section Modulus (Z)	in ³ /ft	36.6	Section Width	inches	17
Moment of Inertia (I)	in ⁴ /ft	201.2	UV Stabilized		Yes
Ultimate Tensile Stress	psi	6,300	Standard		12
Creep Limited stress	psi	4,000	Packaging		bundle